

HO-PAC® 1600 RAMMER COMPACTOR



○ Faster, less expensive technique for driving wood, steel and aluminum sheeting, 'H' and 'I' beams, piling, posts and seawalls

○ Also great for compacting waste materials and breaking up frozen coal

○ Able to compact in densities in excess of 95% Proctor

○ Ideal for trench, slope and excavation compaction

○ Four Function Valve controls flow, pressure, regenerations and oil flow direction

○ Tough coat hoses prevent cuts and extend wear life

○ Oil splash lubrication provides maintenance free (no greasing) bearing lubrication

HO-PAC COMPACTOR DRIVERS


Ho-Pac compactor drivers save you time, money, and increase productivity by expanding versatility and eliminating the need for special purpose machines. Ho-Pac models use an eccentric, rotating weight that creates vibrations and impulse energy for effective soil compaction and are extremely efficient at driving piling, posts, pipe, guardrails posts, etc.

**Ram
mer®**

HO-PAC® 1600

SPECIFICATIONS

Impulse Force (lbs)	16,000
Operating Frequency (rpm)	2,100
Hydraulic Flow Options (gpm)	25/30/43
Operating Pressure (psi)	3,000/3,000/2,600
Overall Height (inch)	32
Compaction Plate Dimensions (inch)	29 x 44
Compaction Area (sq ft)	6.4
Mounting Bracket Type	SR/MR
Working Weight ¹ (lbs)	1,900
Carrier Weight Class ² (1,000 lbs)	19-45

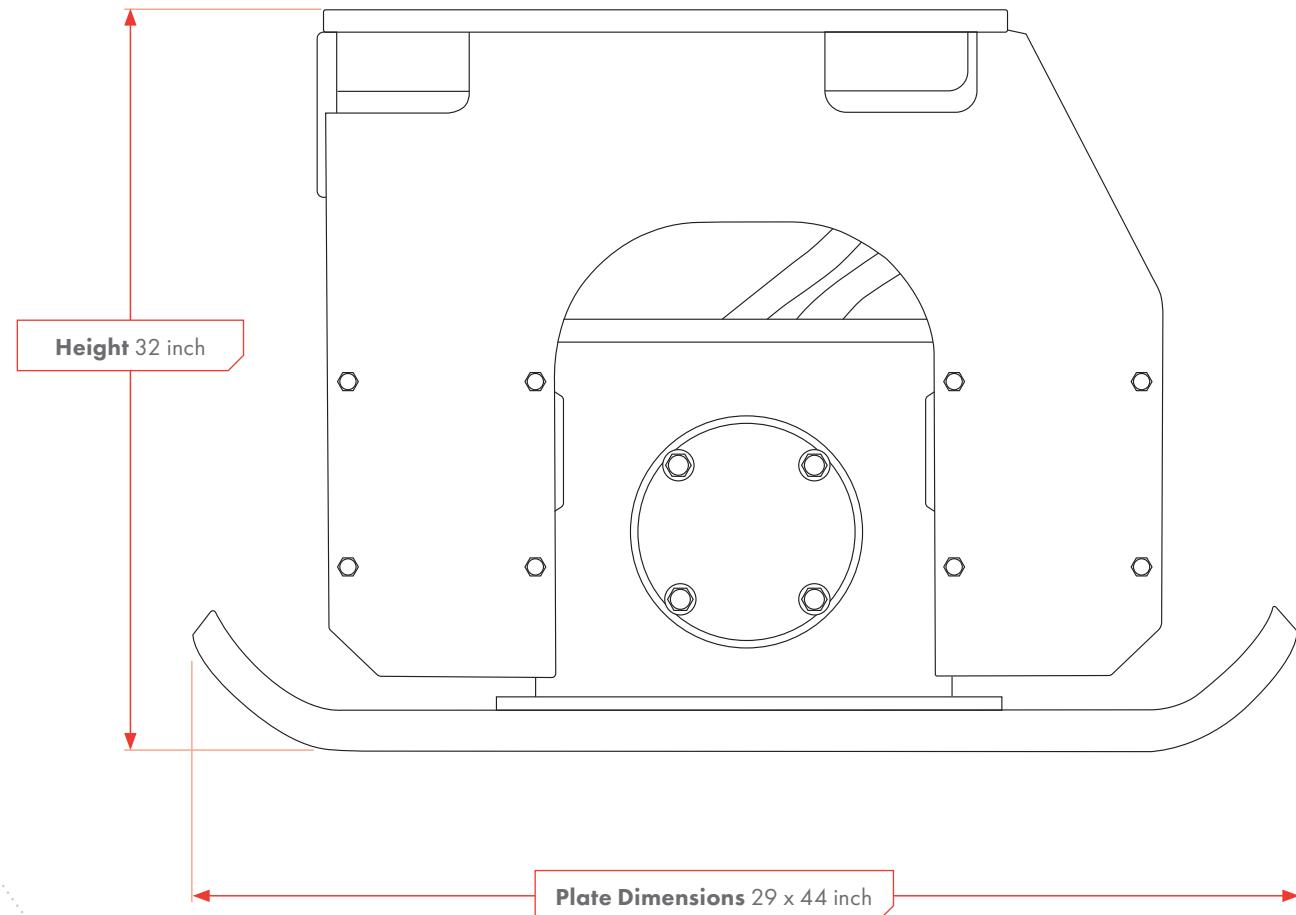

¹ Weight of compactor with typical mounting bracket

² Use as guideline only. Verify carrier's lifting and hydraulic capabilities.

Sandvik Rock Processing Solutions North America
Cleveland, OH 44114
Phone (216) 431-2600
rammer.com

Ram
mer®