

HO-PAC® 1000CS RAMMER COMPACTOR



Ideal for preparing streets, driveways or sidewalks, backfilling against curbs and gutters, highway pavement and concrete slabs

Smoothing, leveling and compacting sub-soil to prepare for sodding or seeding Base plate compacts soil in flatwork while skid-steer moving forward or in reverse

Able to compact in densities in excess of 95% Proctor

Four Function Valve controls flow, pressure, regenerations and oil flow direction

Tough coat hoses prevent cuts and extend wear life

Grease filled, sealed bearings provide maintenance free lubrication

HO-PAC COMPACTOR DRIVERS


Ho-Pac compactor drivers save you time, money, and increase productivity by expanding versatility and eliminating the need for special purpose machines. Ho-Pac models use an eccentric, rotating weight that creates vibrations and impulse energy for effective soil compaction and are extremely efficient at driving piling, posts, pipe, guardrails posts, etc.

**Ram
mer®**

HO-PAC® 1000CS

SPECIFICATIONS

Impulse Force (lbs)	8,000
Operating Frequency (rpm)	2,000
Hydraulic Flow Options (gpm)	18
Operating Pressure (psi)	2,000
Overall Height (inch)	28
Compaction Plate Dimensions (inch)	18 x 72 & 18 x 84
Compaction Area (sq ft)	9.0
Mounting Bracket Type	SSU
Working Weight ¹ (lbs)	1,110
Carrier Weight Class ² (1,000 lbs)	4 Minimum

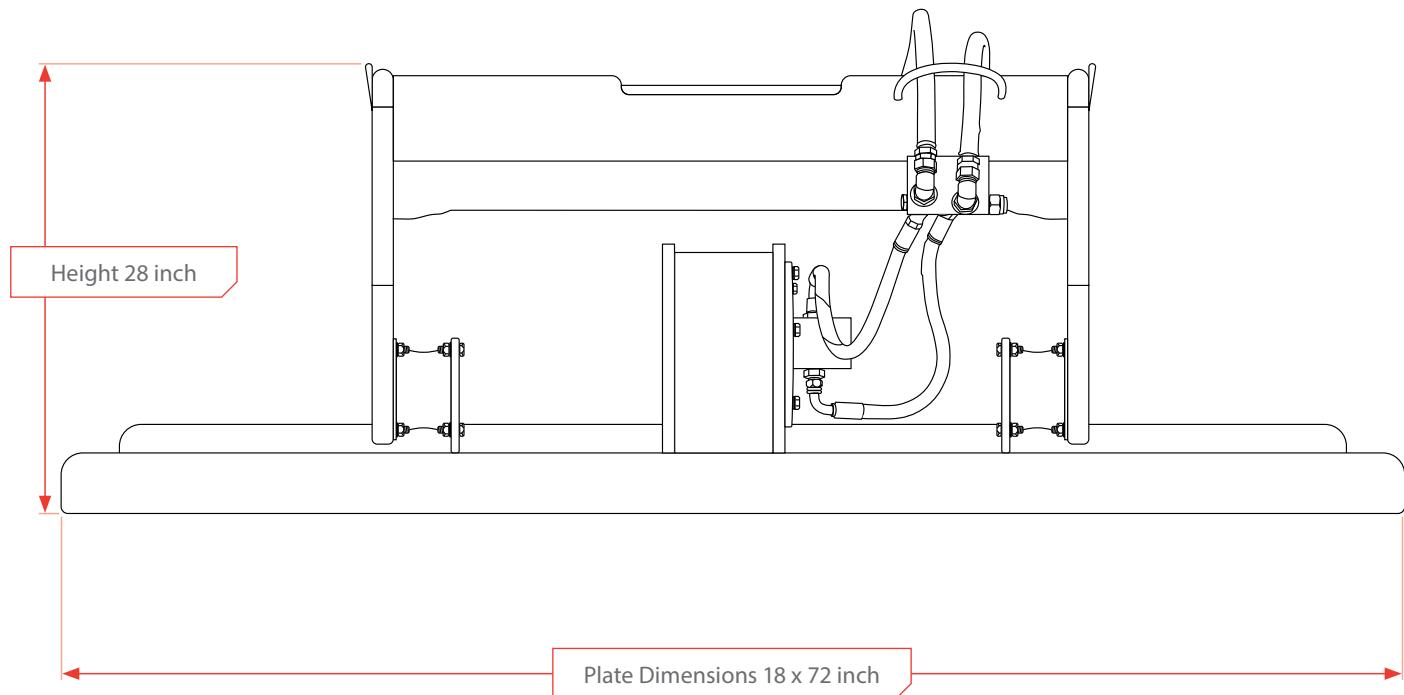

¹ Weight of compactor with typical mounting bracket

² Use as guideline only. Verify carrier's lifting and hydraulic capabilities.

Sandvik Rock Processing Solutions North America
Cleveland, OH 44114
Phone (216) 431-2600
rammer.com

**Ram
mer®**