



MAIN FEATURES AND BENEFITS

HYDRAULIC ROTATION

Equipped with a 360° hydraulic system to allow or correct alignment during use.

REVERSIBLE BLADE

Extends wear life and lowers operating costs by allowing blades to be flipped and reused before replacement is required.


PREMIUM-GRADE WEAR-RESISTANT STEEL

Proudly made with Hardox steel, known for its excellent toughness and impact resistance, making it ideal for heavy-duty applications.

EFFICIENT AND SAFE HANDLING

The robust design allows for efficient and safe handling of most construction materials such as wood, block/brick, plaster.


Rammer® RSS24R

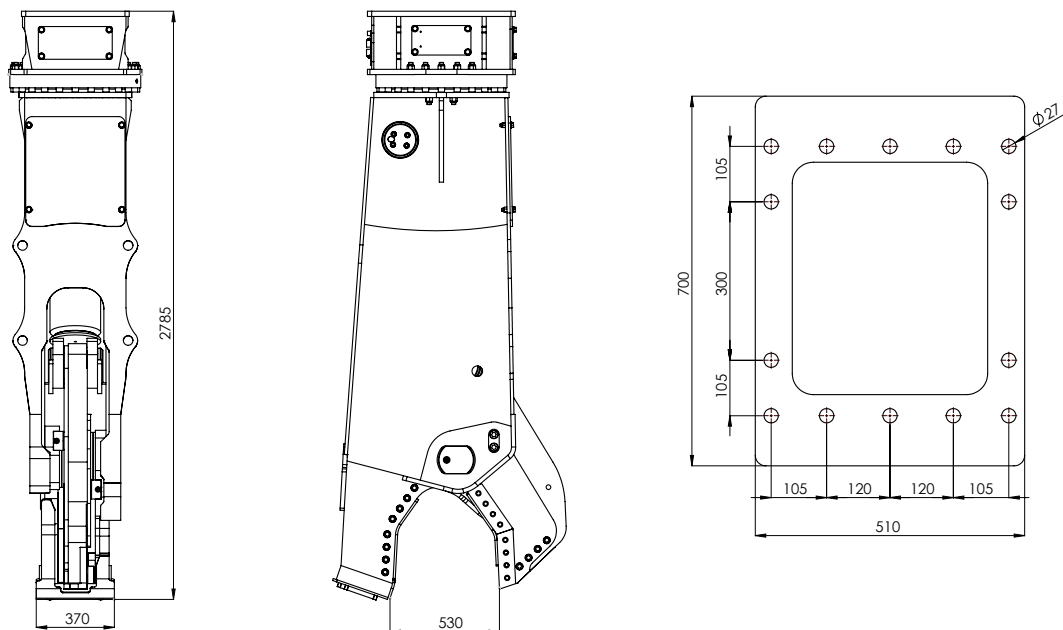

Specifications

WEIGHT	2,080 kg (4,586 lb)
HEIGHT	2,785 mm (110 in)
OPENING	530 mm (21 in)
JAW DEPTH	495 mm (20 in)
OIL PRESSURE	340 bar (4,931 psi)
ROTATION PRESSURE	120 bar (1,740 psi)
ROTATION CAPACITY	20 l/min (4,400 gal/min)
OIL FLOW	200 - 220 l/min (53 - 58 gal/min)
EXCAVATOR WEIGHT BOOM	14 - 18 t (30,800 - 39,700 lb)
EXCAVATOR WEIGHT BUCKET	20 - 28 t (44,000 - 61,700 lb)

Specifications are subject to change without notice

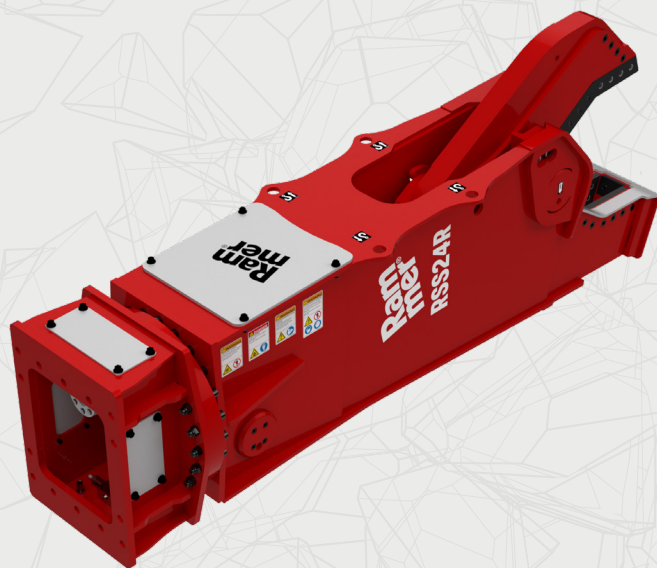

Rammer is steadily working to improve its sustainability. For us, the durability of our products is one of the key elements in paving the way towards a better future. Developed in the harshest conditions, Rammer's products are designed specifically to stand the test of time, no matter the climate or application they're used for. In a world where things are constantly changing, Rammer's products are the trusted players that stand by your side, whatever challenges may come.

Sandvik Rock Processing

www.rammer.com

**Ram
mer®**