
RCC14R

RCC14R RCC19R RCC26R RCC35R RCC42R RCC45R

BUILT TO BREAK THROUGH

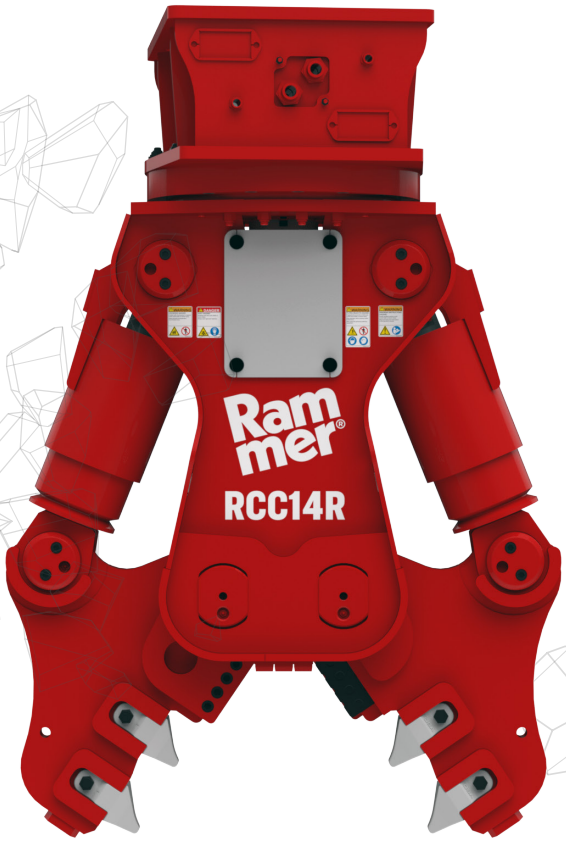


PRIMARY DEMOLITION OF CONCRETE AND REINFORCED CONCRETE


TWO TASKS, ONE ATTACHMENT
Combine concrete crushing and rebar cutting in one versatile demolition tool.

PRECISE POSITIONING
Hydraulic rotation helps position the jaws for controlled demolition work.

BUILT FOR DEMANDING WORK
HARDOX steel construction and protected cylinders support durability in demolition applications.

RCC14R

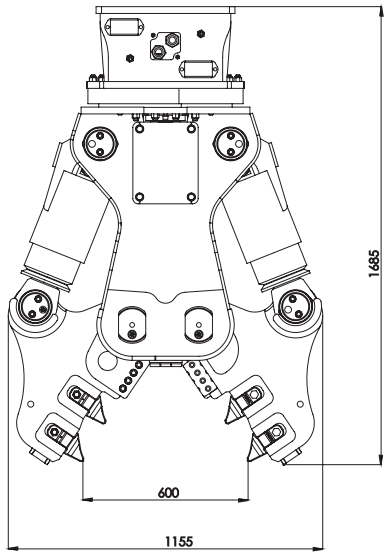

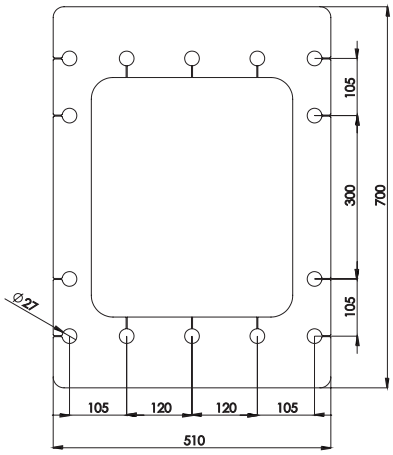

SPECIFICATIONS | RCC14R

OPENING (A)	600 mm / 24 in
HEIGHT (B)	1700 mm / 67 in
WIDTH (C)	460 mm / 18 in
WEIGHT	1036 kg / 2284 lbs
OIL PRESSURE	310 bar / 4496 psi
OIL CAPACITY	110–150 l/min | 29–39 gal/min
ROTATION PRESSURE	120 bar / 1740 psi
ROTATION CAPACITY	15–20 l/min | 4–5 gal/min
EXCAVATOR WEIGHT	12–16 ton | 26400–35200 lbs
OPERATING TOTAL WEIGHT	1150 kg / 2535 lbs

FIND OUT MORE

Explore RCC14R
Explore specifications, applications and product features.

VIEW PRODUCT DETAILS

Specifications are subject to change without notice