
RGP12R

RGP12R RGP17R RGP21R RGP26R RGP40R RGP48R RGP55R

TAKE CONTROL

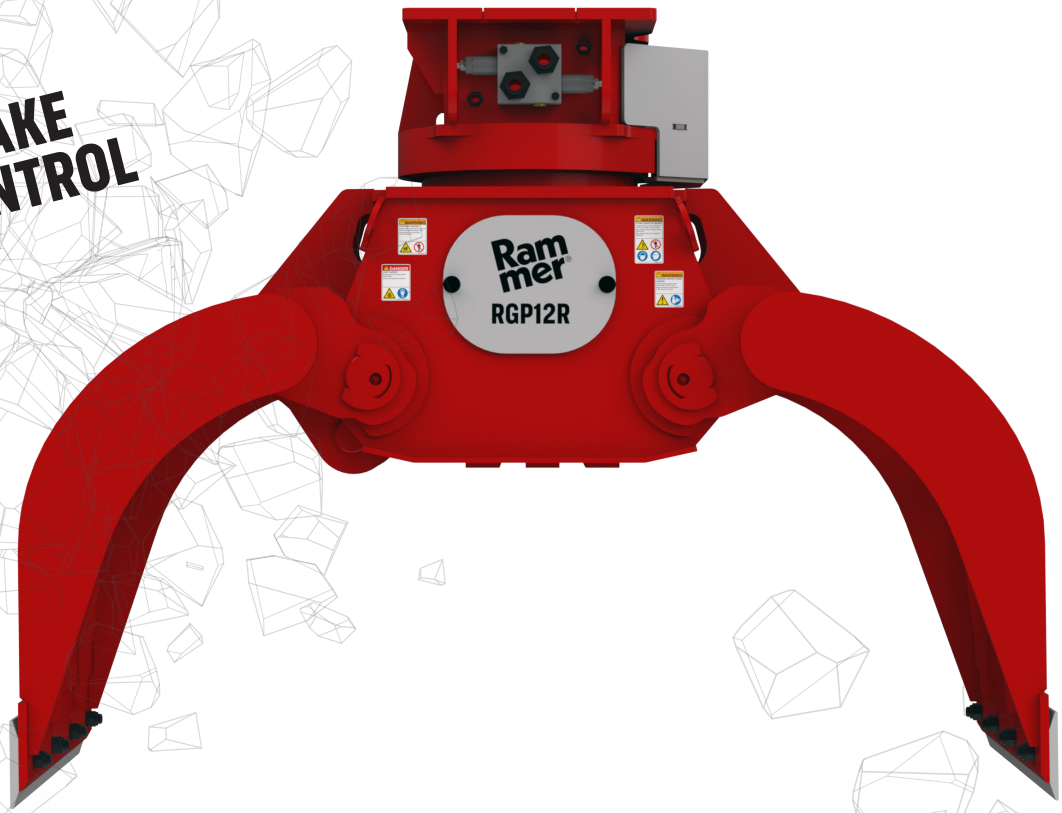


GROUND-LEVEL SECONDARY PROCESSING AND MATERIAL SEPARATION


VERSATILE MATERIAL HANDLING
Handle, sort and separate demolition materials for efficient processing and recycling.

PRECISE POSITIONING
Hydraulic rotation helps position the grapple for controlled material handling.

PROTECTED HYDRAULICS
A pressure relief valve helps protect the hydraulic system from excessive pressure.

RGP12R

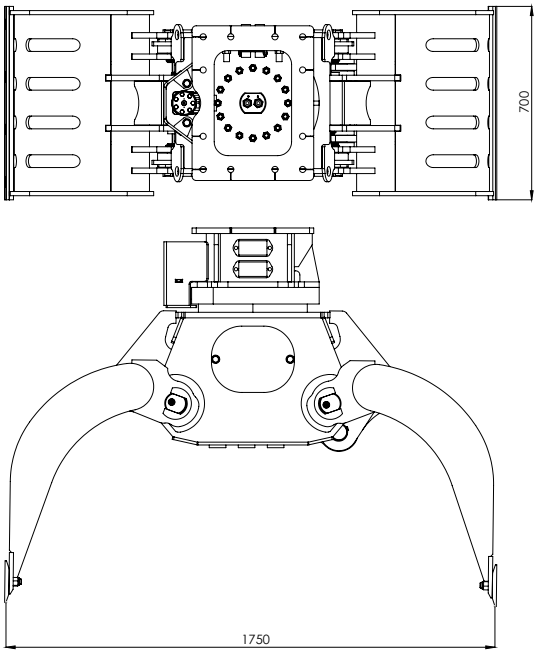

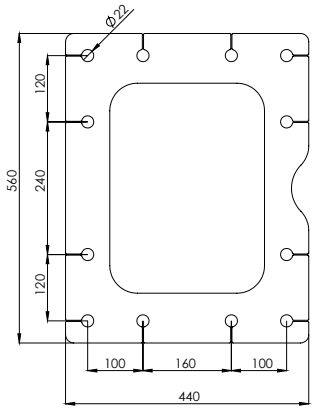

SPECIFICATIONS | RGP12R	
OPENING (A)	1750 mm / 69 in
HEIGHT (B)	1240 mm / 48.8 in
WIDTH (C)	700 mm / 27.5 in
EXCAVATOR WEIGHT	9–14 ton | 19800–30800 lbs
WEIGHT	737 kg / 1625 lbs
OIL PRESSURE	250 bar / 3626 psi
OIL CAPACITY	50 l/min / 13.2 gal/min
ROTATION PRESSURE	50 bar / 725 psi
ROTATION CAPACITY	15 l/min / 4 gal/min
OPERATING TOTAL WEIGHT	810 kg / 1786 lbs

FIND OUT MORE

Explore RGP12R
Explore specifications, applications and product features.

VIEW PRODUCT DETAILS

Specifications are subject to change without notice