
RMP25R

RMP14R RMP17R RMP25R RMP31R RMP34R RMP43R

ONE TOOL.
MORE
POSSIBILITIES.

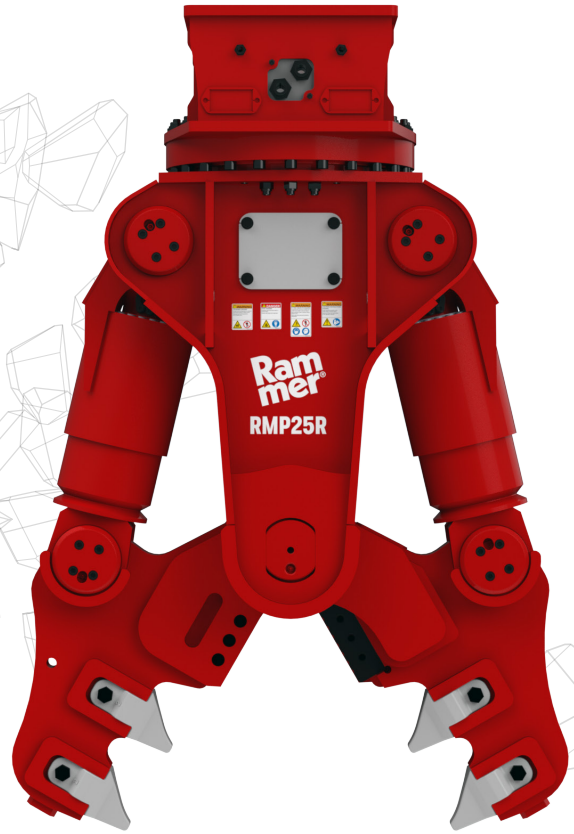

GROUND-LEVEL SECONDARY PROCESSING AND MATERIAL SEPARATION

ONE ATTACHMENT, MULTIPLE APPLICATIONS

Interchangeable jaws allow one attachment to perform different demolition and material processing tasks.


DURABLE CONSTRUCTION


HARDOX steel construction supports wear resistance in demanding demolition applications.

BUILT FOR DEMANDING WORK

A double-cylinder design supports powerful operation in demanding demolition applications.

RMP25R

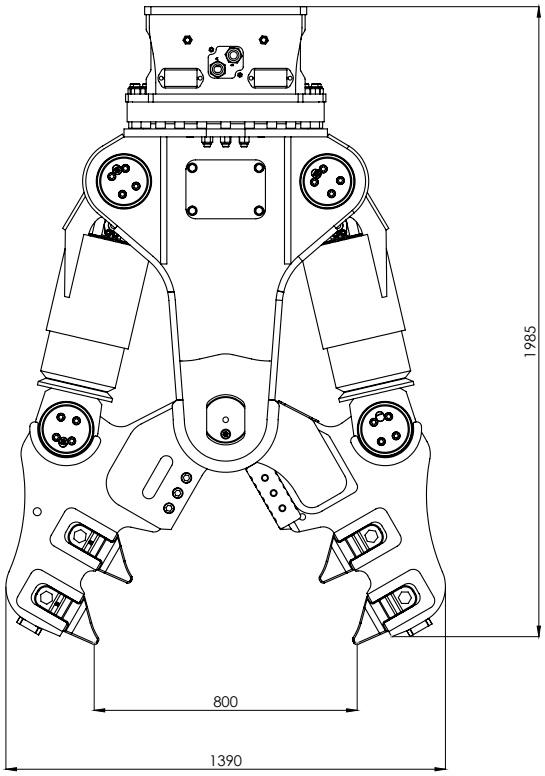

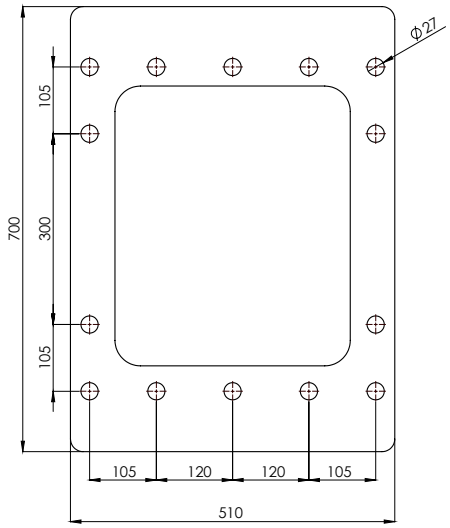

SPECIFICATIONS | RMP25R

OPENING (A)	800 mm / 31.5 in
HEIGHT (B)	2050 mm / 80.7 in
WIDTH (C)	540 mm / 21.3 in
WEIGHT	522 kg / 1150 lbs

FIND OUT MORE

Explore RMP25R
Explore specifications, applications and product features.

VIEW PRODUCT DETAILS

Specifications are subject to change without notice