
RMP34R

RMP14R RMP17R RMP25R RMP31R **RMP34R** RMP43R

ONE TOOL.
MORE
POSSIBILITIES.

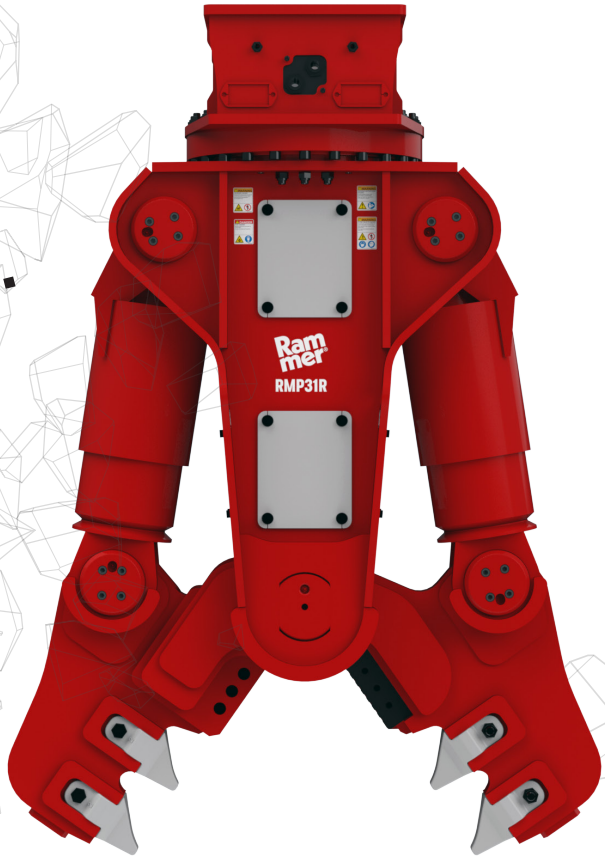

GROUND-LEVEL SECONDARY PROCESSING AND MATERIAL SEPARATION

ONE ATTACHMENT, MULTIPLE APPLICATIONS

Interchangeable jaws allow one attachment to perform different demolition and material processing tasks.


DURABLE CONSTRUCTION


HARDOX steel construction supports wear resistance in demanding demolition applications.

RELIABLE ROTATION AND FASTER CYCLES

Dual hydraulic motors support reliable rotation, while a regenerative valve helps shorten working cycles.

RMP34R

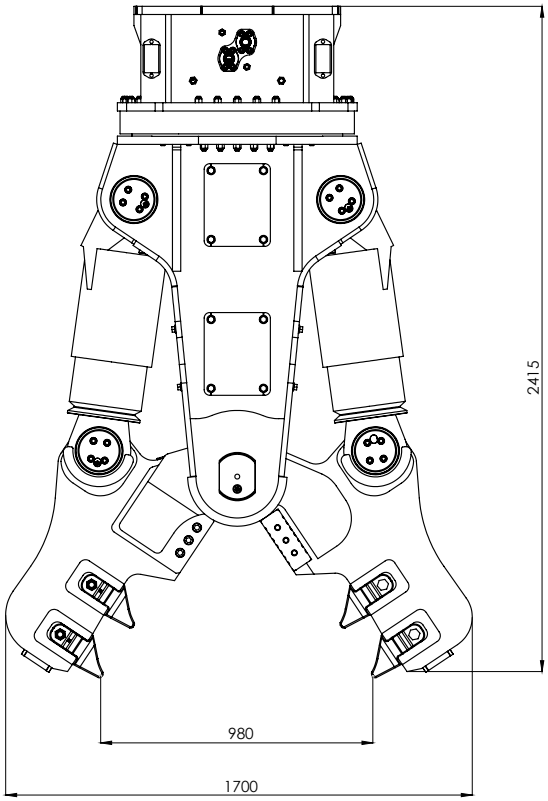

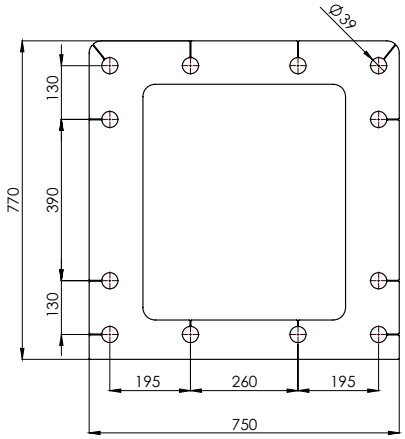

SPECIFICATIONS | RMP34R

OPENING (A)	920 mm / 36.2 in
HEIGHT (B)	2380 mm / 93.7 in
WIDTH (C)	550 mm / 21.7 in
WEIGHT	741 kg / 1633 lbs

FIND OUT MORE

Explore RMP34R
Explore specifications, applications and product features.

VIEW PRODUCT DETAILS

Specifications are subject to change without notice