
RPV13S

RPV13S RPV18S RPV25S RPV38S RPV50S

MADE TO FINISH THE JOB

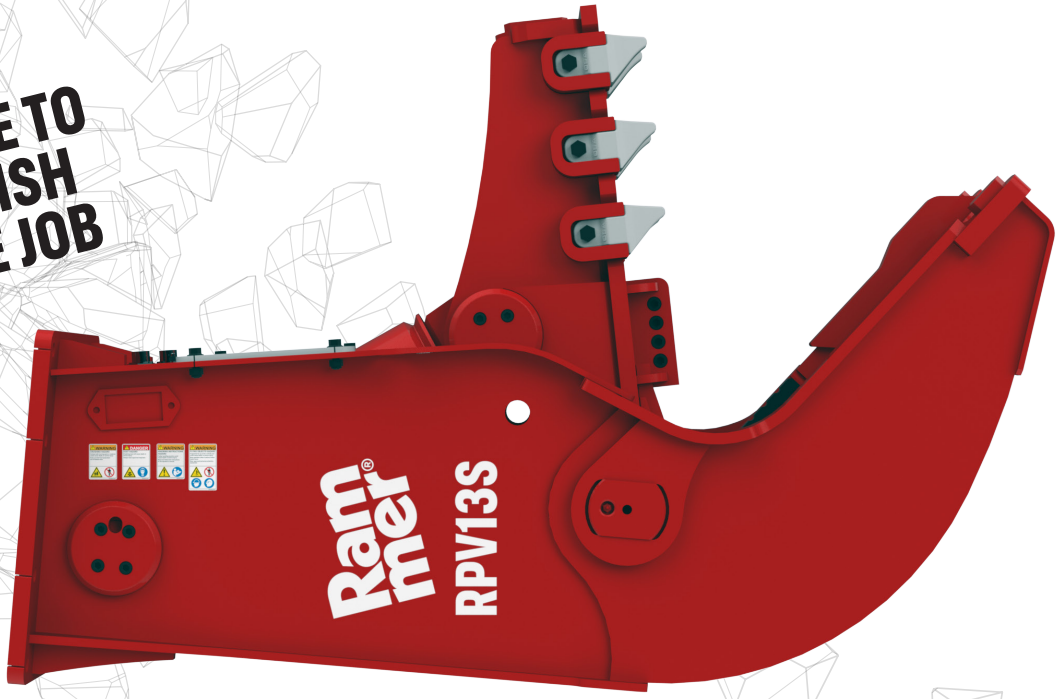

GROUND-LEVEL SECONDARY PROCESSING AND MATERIAL SEPARATION

EFFICIENT SECONDARY PROCESSING

Crush concrete and separate reinforcement during ground-level demolition and material processing.


DURABLE CONSTRUCTION


HARDOX steel construction supports wear resistance in demanding demolition applications.


PROTECTED HYDRAULICS

A pressure relief valve helps protect the hydraulic system from excessive pressure.

RPV13S

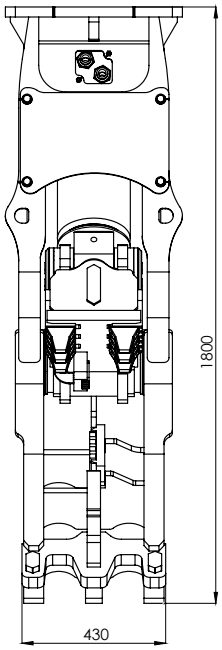

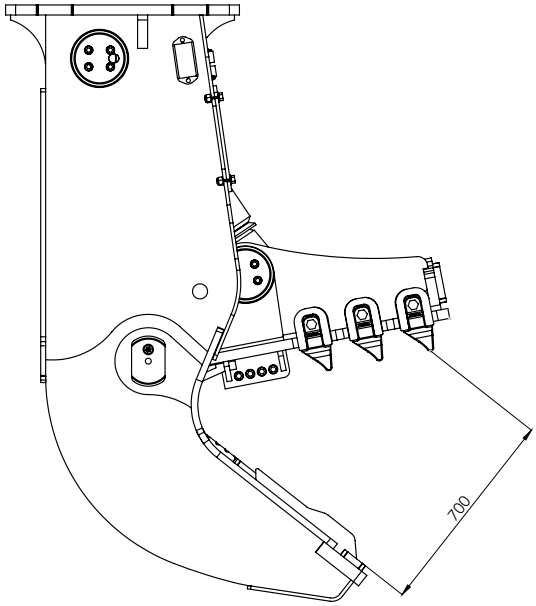

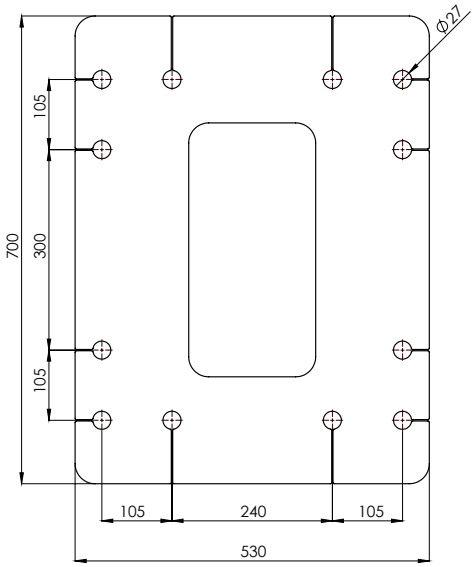

SPECIFICATIONS | RPV13S	
OPENING (A)	700 mm / 27 in
HEIGHT (B)	1920 mm / 76 in
WIDTH (C)	400 mm / 15.8 in
WEIGHT	1100 kg / 2425 lbs
OIL PRESSURE	310 bar / 4495 psi
OIL CAPACITY	180–220 l/min | 47–58 gal/min
EXCAVATOR WEIGHT	12–17 ton | 26500–37500 lbs
OPERATING TOTAL WEIGHT	1220 kg / 2690 lbs

FIND OUT MORE

Explore RPV13S
Explore specifications, applications and product features.

VIEW PRODUCT DETAILS

Specifications are subject to change without notice