
# RPV18R

RPV18R RPV23R RPV30R RPV35R RPV47R

PRECISION MEETS POWER.

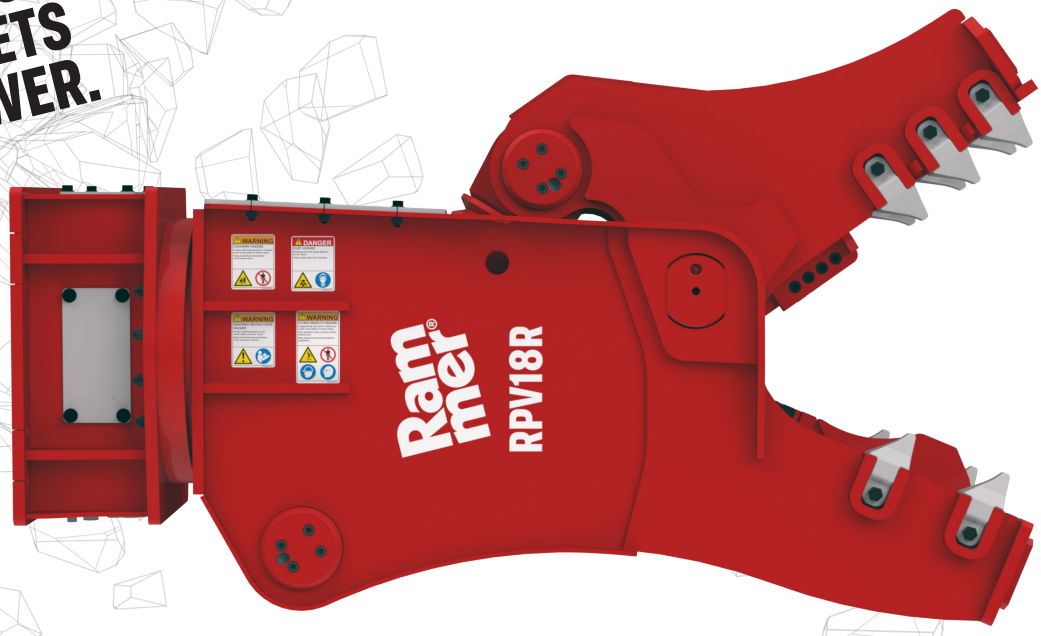


## VERSATILE CONCRETE PROCESSING WITH HYDRAULIC ROTATION

### EFFICIENT CONCRETE PROCESSING

Crush concrete and separate reinforcement for efficient demolition and material processing.


### PRECISE POSITIONING


Hydraulic rotation allows accurate jaw positioning for controlled demolition work.


### BUILT FOR DEMANDING WORK

HARDOX steel construction and replaceable cutting blades support durability and long service life.

# RPV18R

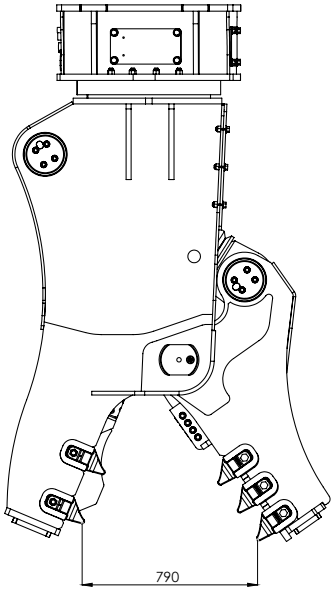

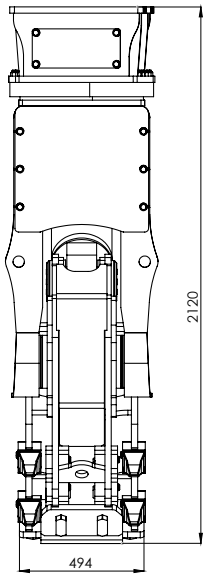
| SPECIFICATIONS \| RPV18R | |
|---|---|
| OPENING (A) | 790 mm / 31 in |
| HEIGHT (B) | 2120 mm / 83.5 in |
| WIDTH (C) | 415 mm / 16.3 in |
| WEIGHT | 1710 kg / 3760 lbs |
| OIL PRESSURE | 340 bar / 4931 psi |
| OIL CAPACITY | 150–220 l/min \| 39–58 gal/min |
| ROTATION PRESSURE | 120 bar / 1740 psi |
| ROTATION CAPACITY | 15–20 l/min \| 4–5 gal/min |
| OPERATING TOTAL WEIGHT | 1850 kg / 4078 lbs |
| EXCAVATOR WEIGHT | 15–20 ton \| 33000–44000 lbs |
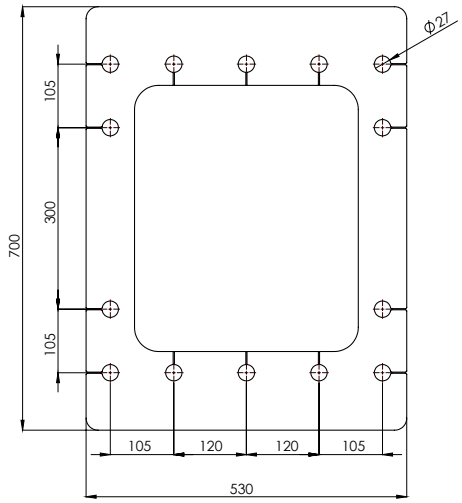
## FIND OUT MORE

**Explore RPV18R**
Explore specifications, applications and product features.

VIEW PRODUCT DETAILS

Specifications are subject to change without notice