
RPV18S

RPV13S RPV18S RPV25S RPV38S RPV50S

MADE TO FINISH THE JOB

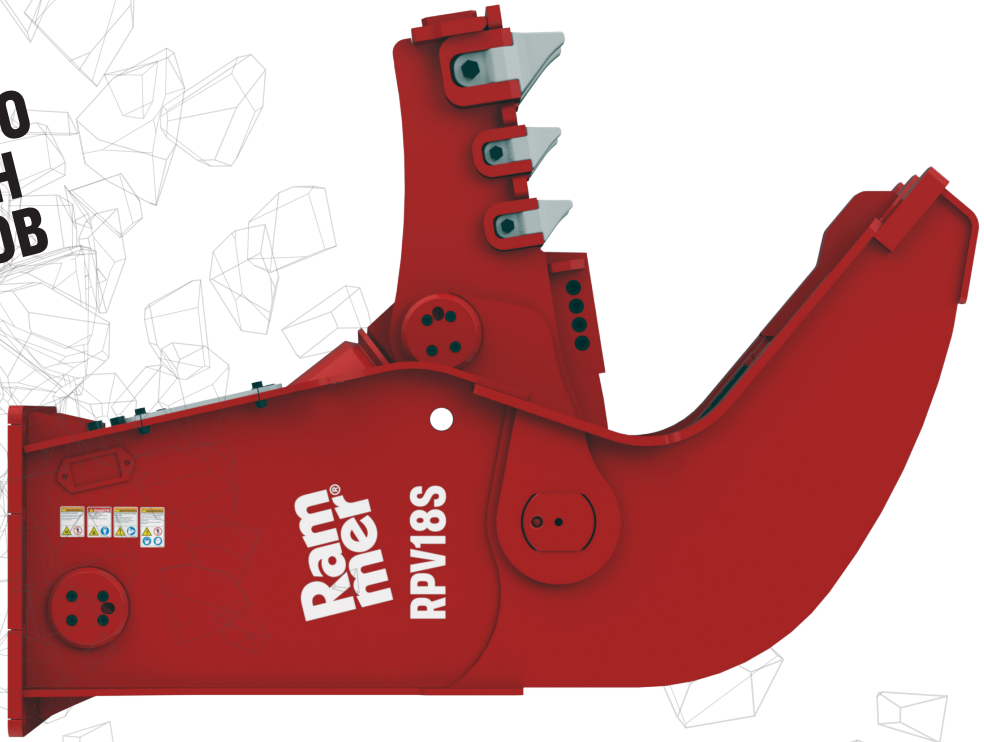

GROUND-LEVEL SECONDARY PROCESSING AND MATERIAL SEPARATION

EFFICIENT SECONDARY PROCESSING

Crush concrete and separate reinforcement during ground-level demolition and material processing.


DURABLE CONSTRUCTION

HARDOX steel construction supports wear resistance in demanding demolition applications.

PROTECTED HYDRAULICS

A pressure relief valve helps protect the hydraulic system from excessive pressure.

RPV18S

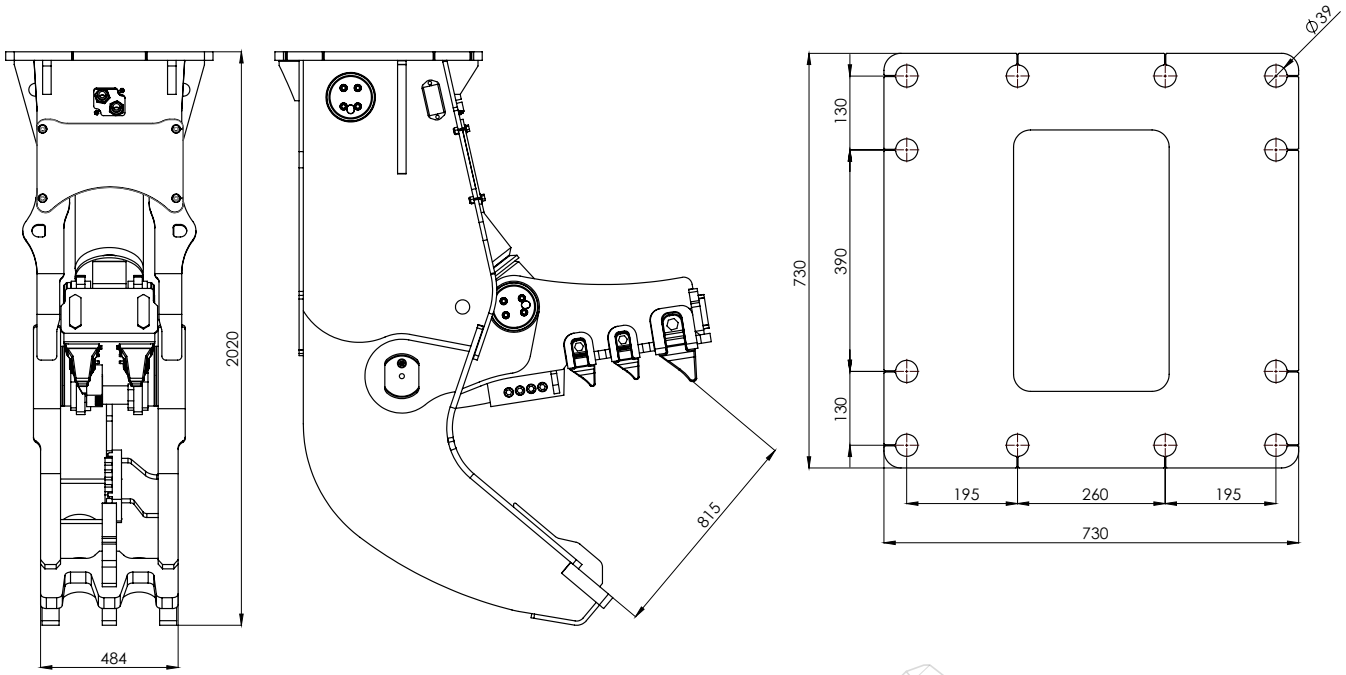

SPECIFICATIONS | RPV18S	
OPENING (A)	815 mm / 32 in
HEIGHT (B)	2080 mm / 82 in
WIDTH (C)	460 mm / 18.1 in
WEIGHT	1550 kg / 3417 lbs
OIL PRESSURE	340 bar / 4931 psi
OIL CAPACITY	200–240 l/min | 52–63 gal/min
EXCAVATOR WEIGHT	16–20 ton | 35200–44000 lbs
OPERATING TOTAL WEIGHT	1700 kg / 3748 lbs

FIND OUT MORE

Explore RPV18S
Explore specifications, applications and product features.

VIEW PRODUCT DETAILS

Specifications are subject to change without notice