RSS60R

RSS24R RSS30R RSS37R RSS52R **RSS60R** RSS85R

CUT WITHOUT COMPROMISE




STEEL CUTTING FOR DEMOLITION, SCRAP PROCESSING AND RECYCLING


VERSATILE STEEL CUTTING
Cut steel structures and scrap materials for demolition and recycling applications.


LONGER BLADE LIFE
Reversible cutting blades help extend blade usability and reduce replacement frequency.

RELIABLE ROTATION AND FASTER CYCLES
Durable construction supports reliable performance in demanding steel-cutting applications.

RSS60R

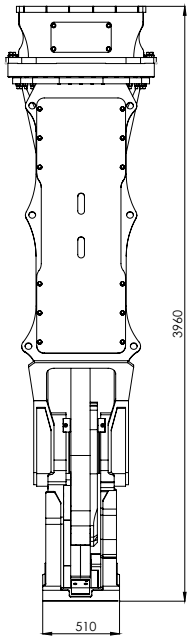

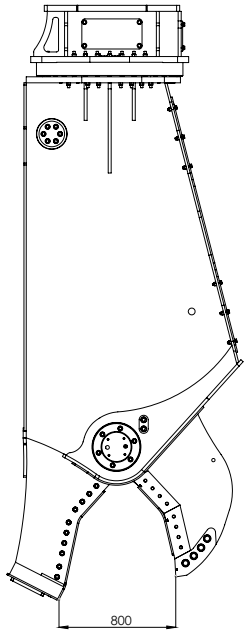

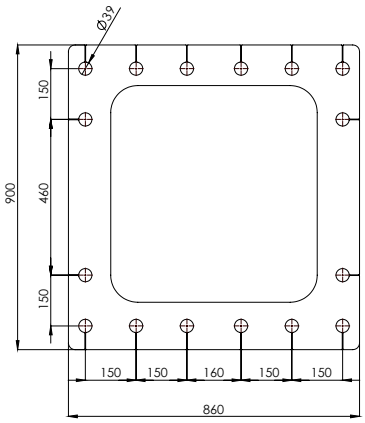

SPECIFICATIONS | RSS60R	
OPENING (A)	800 mm / 31.5 in
HEIGHT (B)	3960 mm / 156 in
WIDTH (C)	835 mm / 33 in
WEIGHT	5691 kg / 12542 lbs
OIL PRESSURE	340 bar / 4931 psi
OIL CAPACITY	350–400 l/min | 92–106 gal/min
ROTATION PRESSURE	120 bar / 1740 psi
ROTATION CAPACITY	40 l/min / 10.5 gal/min
EXCAVATOR WEIGHT AT BUCKET PLACE	50–70 ton | 110200–154300 lbs
EXCAVATOR WEIGHT AT BOOM PLACE	30–45 ton | 66200–99200 lbs

FIND OUT MORE

Explore RSS60R
Explore specifications, applications and product features.

VIEW PRODUCT DETAILS

Specifications are subject to change without notice