RSS85R

RSS24R RSS30R RSS37R RSS52R RSS60R RSS85R

CUT WITHOUT COMPROMISE




STEEL CUTTING FOR DEMOLITION, SCRAP PROCESSING AND RECYCLING


VERSATILE STEEL CUTTING
Cut steel structures and scrap materials for demolition and recycling applications.


LONGER BLADE LIFE
Reversible cutting blades help extend blade usability and reduce replacement frequency.

RELIABLE ROTATION AND FASTER CYCLES
Durable construction supports reliable performance in demanding steel-cutting applications.

RSS85R

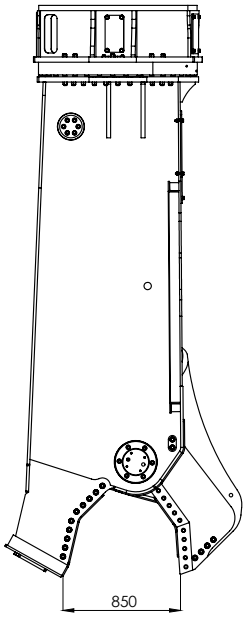

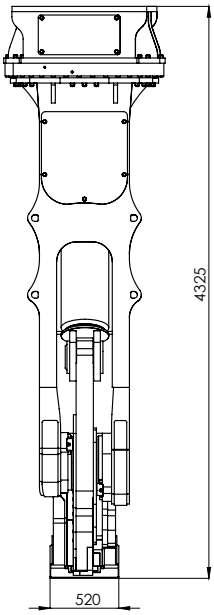

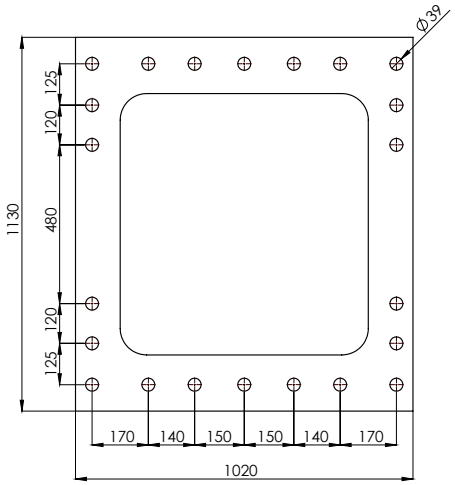

SPECIFICATIONS | RSS85R

OPENING (A)	850 mm / 33 in
HEIGHT (B)	4700 mm / 185 in
WIDTH (C)	880 mm / 35 in
WEIGHT	6900 kg / 15212 lb
OIL PRESSURE	340 bar / 4931 psi
OIL CAPACITY	380–430 l/min | 100–113 gal/min
ROTATION PRESSURE	120 bar / 1740 psi
ROTATION CAPACITY	40 l/min / 10.5 gal/min
EXCAVATOR WEIGHT AT BUCKET PLACE	70–100 t | 154300–220400 lb
EXCAVATOR WEIGHT AT BOOM PLACE	45–60 t | 99200–132300 lb

FIND OUT MORE

Explore RSS85R
Explore specifications, applications and product features.

VIEW PRODUCT DETAILS

Specifications are subject to change without notice