


# Rammer®

# RMP43R

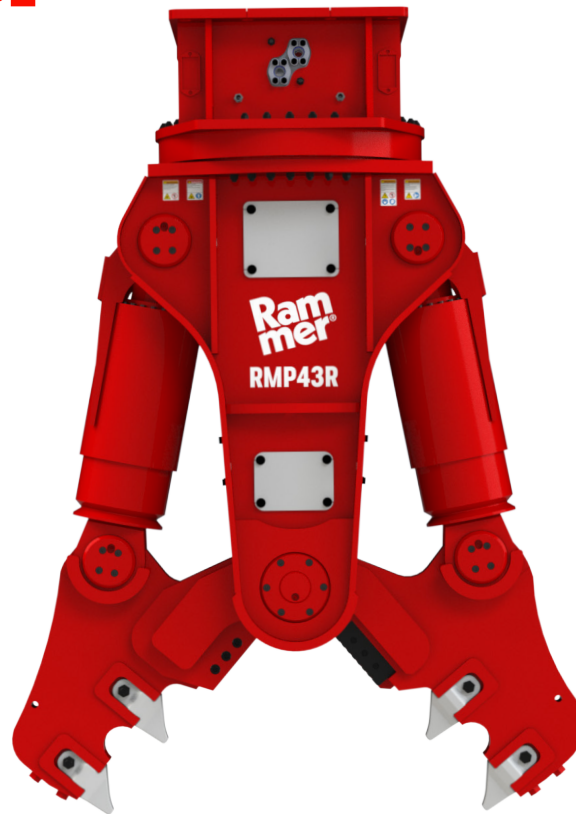

## MAIN FEATURES AND BENEFITS

### SPEED VALVE

Regenerative valve for faster opening and closing cycles and improved jobsite efficiency.

### STRUCTURE MADE OF HARDOX STEEL

Manufactured using Hardox steel for excellent toughness and wear resistance, ensuring long service life in demanding demolition applications.

### MINIMIZE DOWNTIME


Blades are usable on all four edges to maximize wear life and reduce downtime and maintenance costs.

### INTERCHANGEABLE HIGH-PENETRATION TEETH

Improve material breakage efficiency and cutting performance with High-penetrating, Interchangeable teeth.

[RAMMER.COM](https://www.rammer.com)

# Rammer® RMP43R

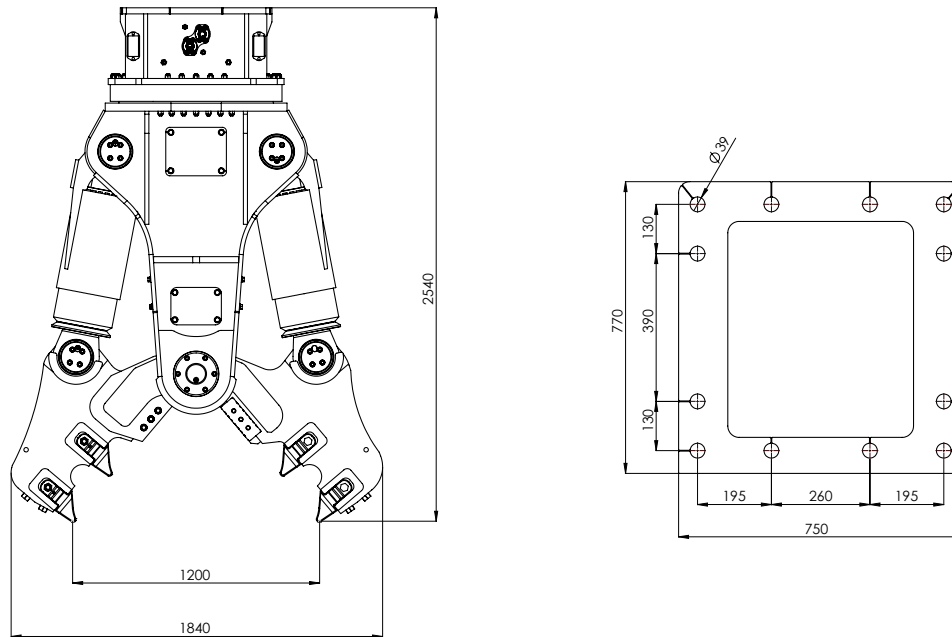

## Specifications

	RMP43R
Weight kg (lb)	2510 (5534)
Oil Pressure bar (psi)	340 (4931)
Oil Flow l/min (gal/min)	300/350 (79/92)
Rotation Pressure bar (psi)	120 (1740)
Rotation Flow l/min (gal/min)	40 (10)
Excavator Weight ton (lb)	36-50 (79400-110200)
Total Operating Weight kg (lb)	3800 (8377)

RMP43R - PULVERIZER KIT	
Opening mm (in)	1000 (39)
Height mm (in)	2537 (100)
Width mm (in)	576 (22)
Weight kg (lb)	1151 (2537)

RMP43R - CRUSHER KIT	
Opening mm (in)	1200 (47)
Height mm (in)	2480 (97)
Width mm (in)	600 (23)
Weight kg (lb)	843 (2450)

RMP43R - SHEAR KIT	
Opening mm (in)	620 (24)
Height mm (in)	2430 (95)
Width mm (in)	430 (17)
Weight kg (lb)	960 (2166)

Specifications are subject to change without notice



Rammer is steadily working to improve its sustainability. For us, the durability of our products is one of the key elements in paving the way towards a better future. Developed in the harshest conditions, Rammer's products are designed specifically to stand the test of time, no matter the climate or application they're used for. In a world where things are constantly changing, Rammer's products are the trusted players that stand by your side, whatever challenges may come.

Sandvik Rock Processing

[www.rammer.com](http://www.rammer.com)

**Rammer®**